

H707 - Soundbar Mount


for Heckler AV Cart

Compatible with most soundbar and soundbar-shaped devices with M4, M5, or 1/4-20 mounting points spaced apart from 74 mm to 726 mm.

If you have any questions, please contact Heckler.

service@hecklerdesign.com

844-432-5930

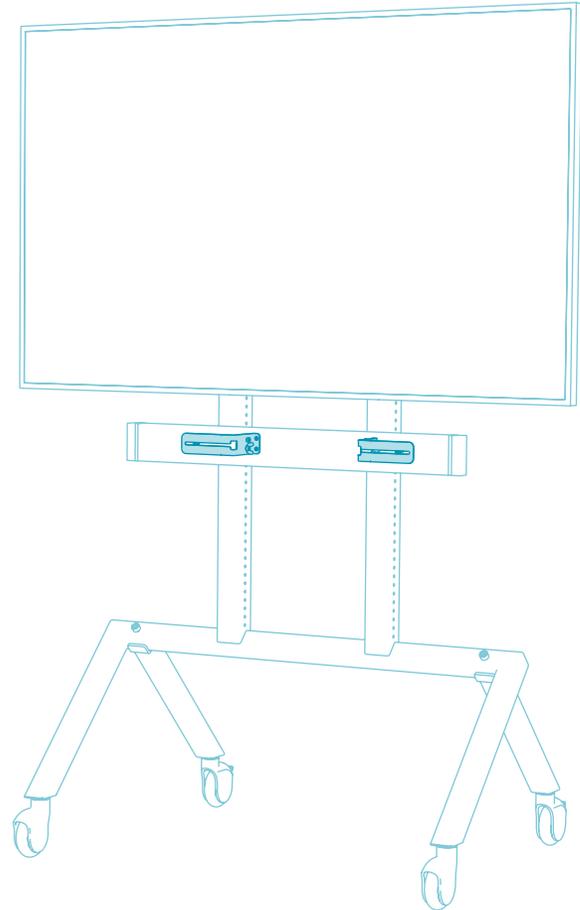

IN THE BOX

- A** 2 x Soundbar Mounting Bracket
- B** 1 x Hex Key, 5mm
- C** 4 x Screw, M6, 10mm
- D** 4 x Wingnut, M6

M4 Soundbar-mounting Hardware

- E** 2 x Set Screw, M4, 20mm
- F** 2 x Wingnut, M4

M5 Soundbar-mounting Hardware


- G** 2 x Set Screw, M5, 20mm
- H** 2 x Wingnut, M5

1/4"-20 Soundbar-mounting Hardware

- I** 2 x Set Screw, 1/4-20, 3/4"
- J** 2 x Wingnut, 1/4-20


For Mounting to H702 Device Panel

- K** 4 x Screw, M4, 12mm
- L** 1 x Hex Key, 2.5mm

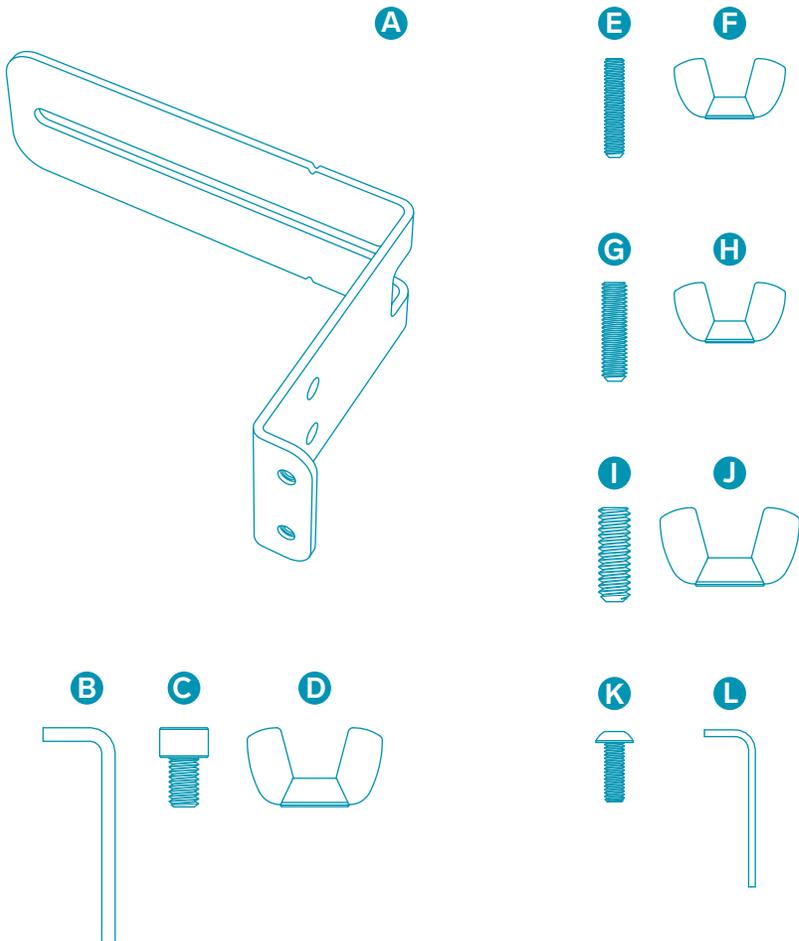

STEP 1


Fasten the appropriate size of set screws to the soundbar and measure the distance between the mounting points.

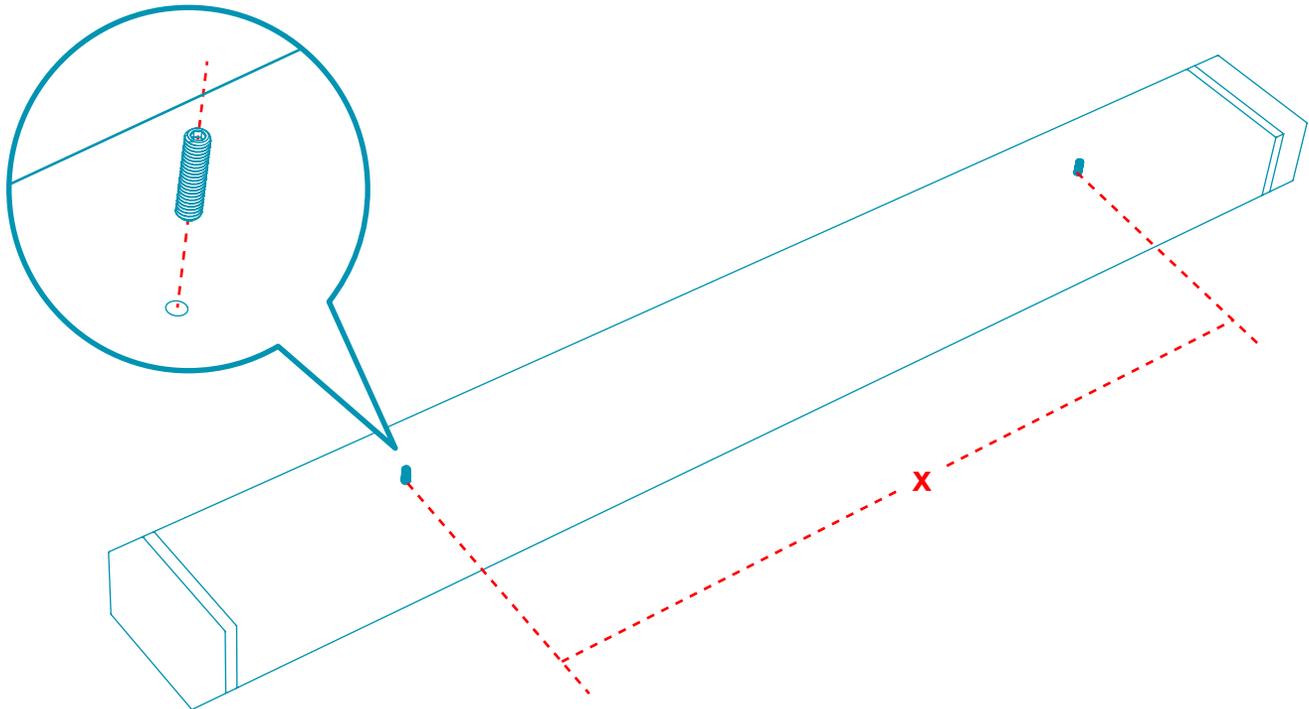


STEP 2

Determine your ideal soundbar position.

Below the display.
Go to page 4.

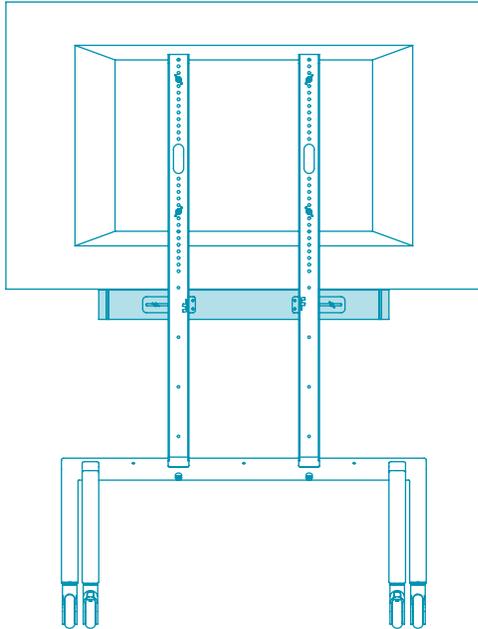

Above the display.
Go to page 11.

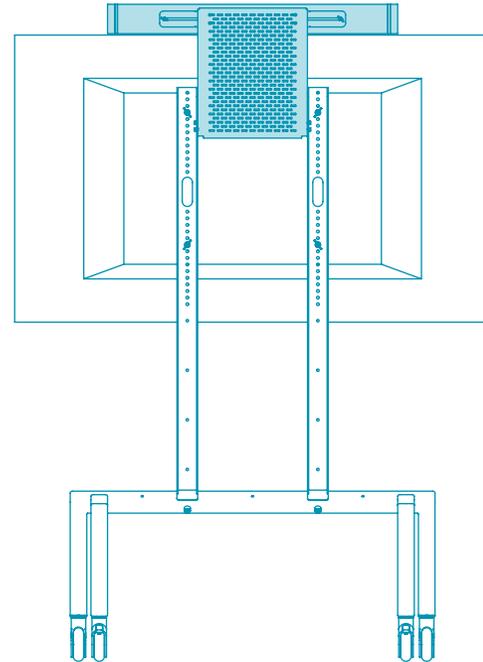

Mounting below the display


STEP 3

Based on the distance between your soundbar's mounting points, determine the correct installation of the soundbar-mounting brackets.

Option A

74 to 273mm (3 to 10.75 inches)


See Page 5

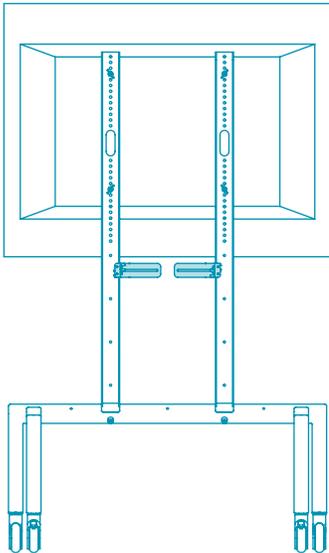

Option B

273 to 400mm (10.75 to 15.75 inches)


See Page 6

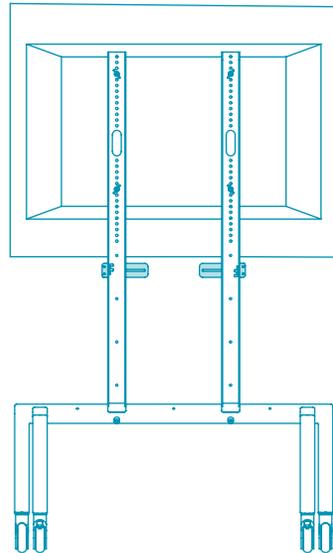

Option C

400 to 585mm (15.75 to 23 inches)


See Page 7

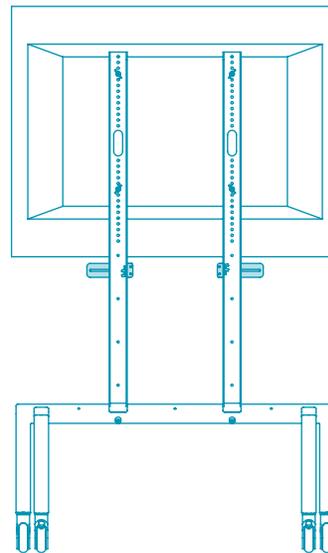

Option D




585 to 726mm (23 to 28.5 inches)

See Page 8

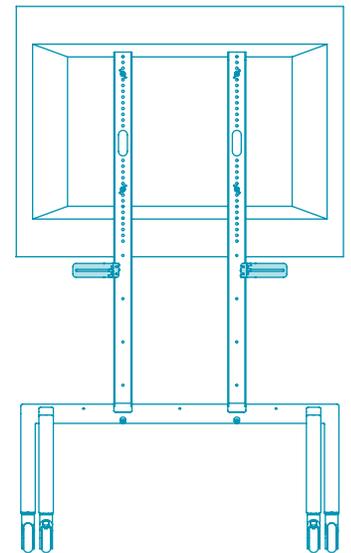




Option A

When the distance between your soundbar's mounting points are spaced 74 to 273mm (3 to 10.75 inches) apart.

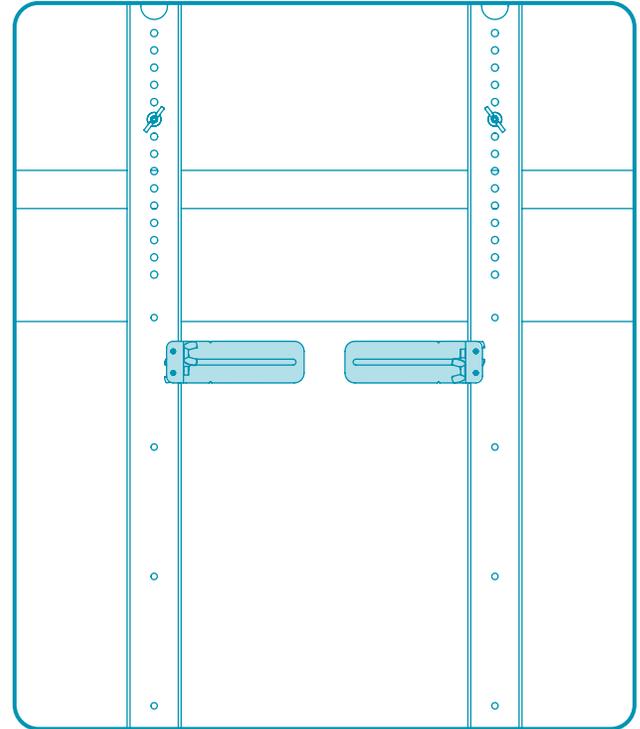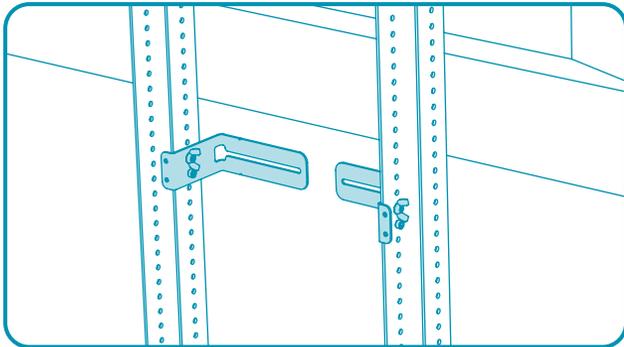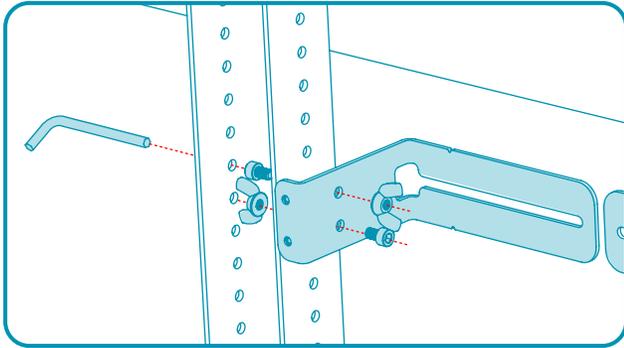




Option B

When the distance between your soundbar's mounting points are spaced 273 to 400mm (10.75 to 15.75 inches) apart.

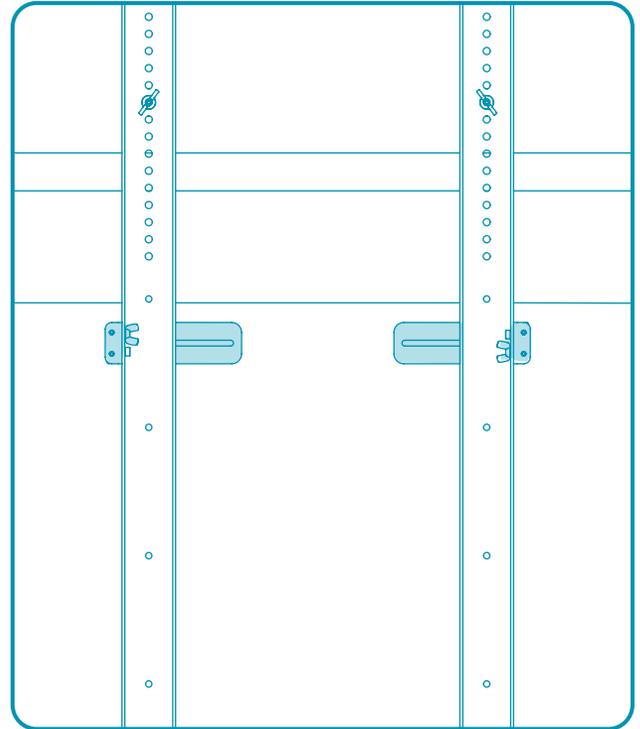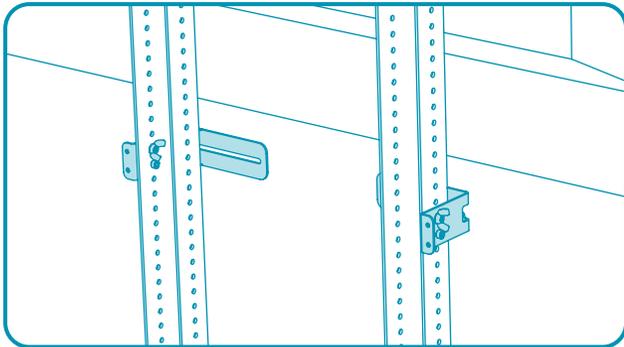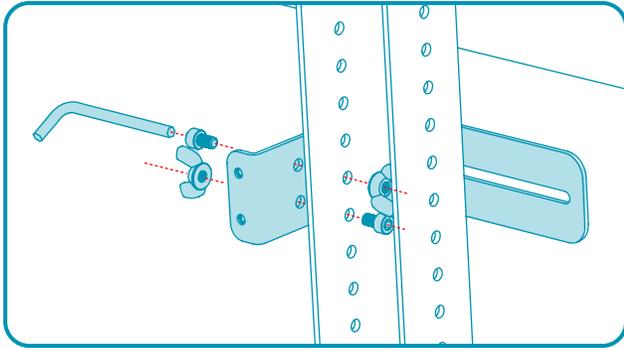




Option C

When the distance between your soundbar's mounting points are spaced 400 to 585mm (15.75 to 23 inches) apart.

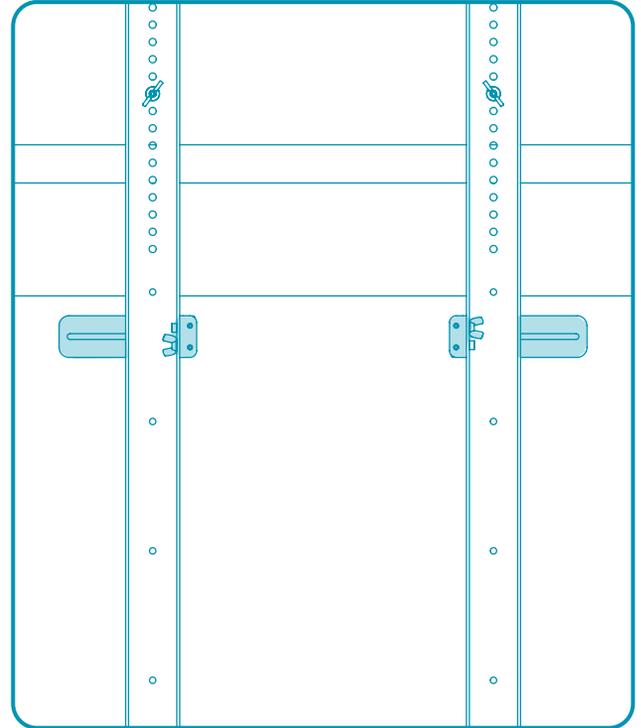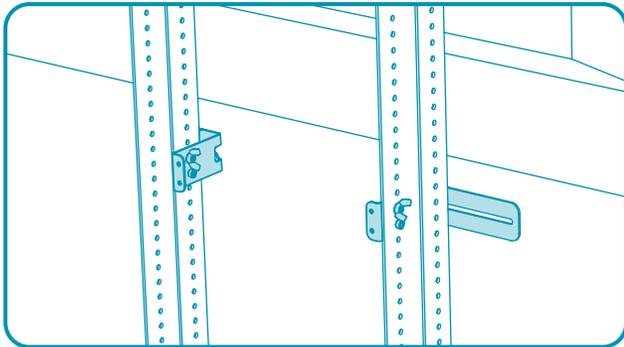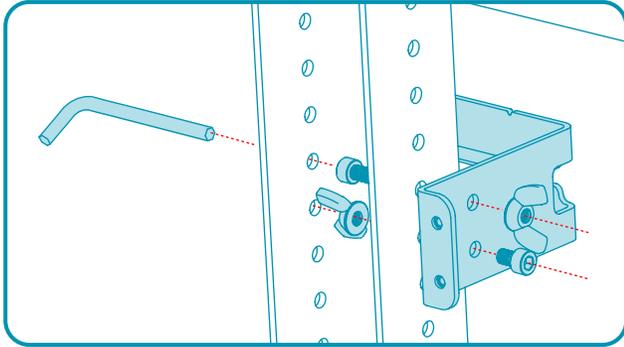




Option D

When the distance between your soundbar's mounting points are spaced 585 to 726mm (23 to 28.5 inches) apart.

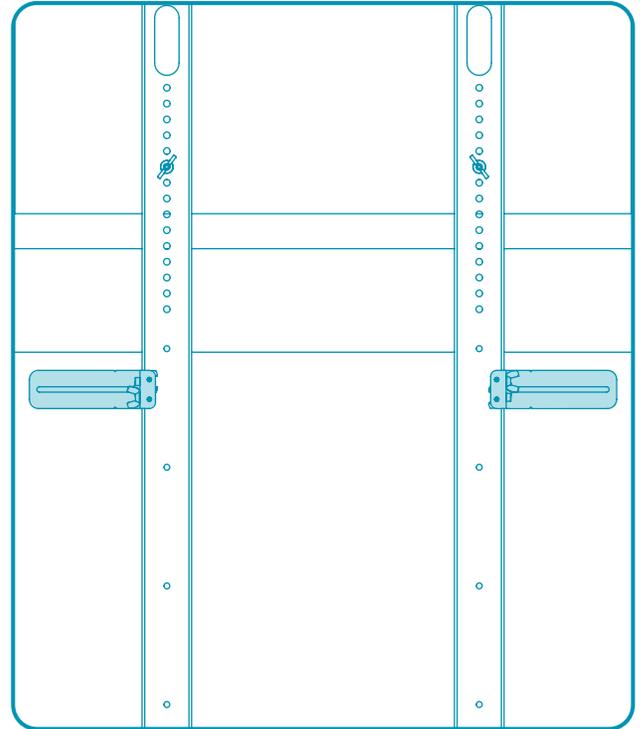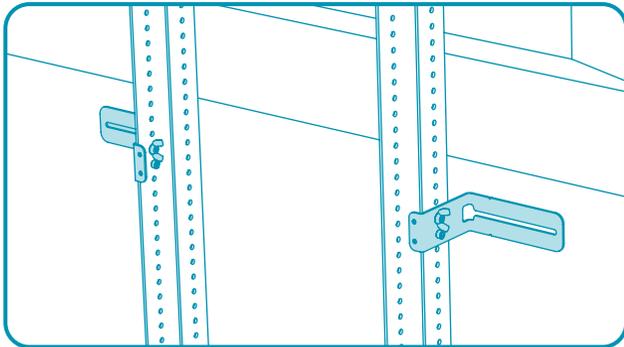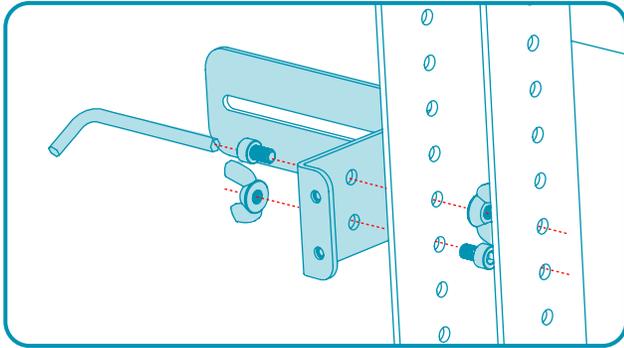



STEP 4

Fasten the wingnuts and install the soundbar.

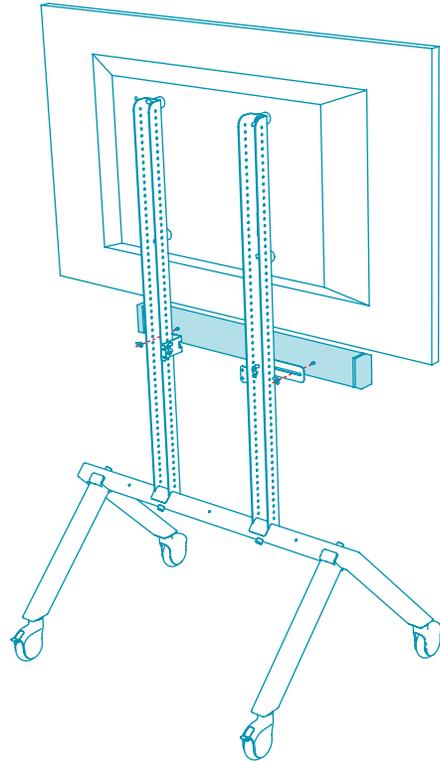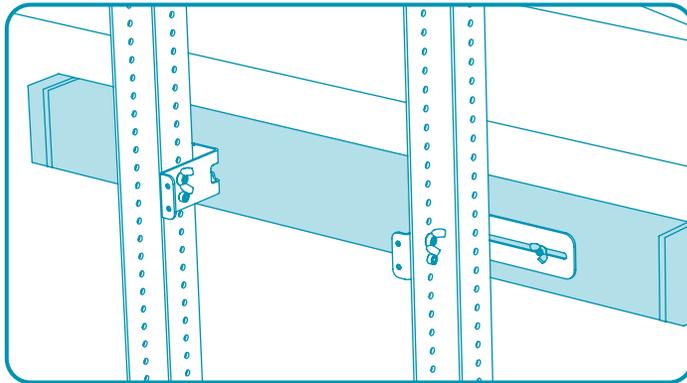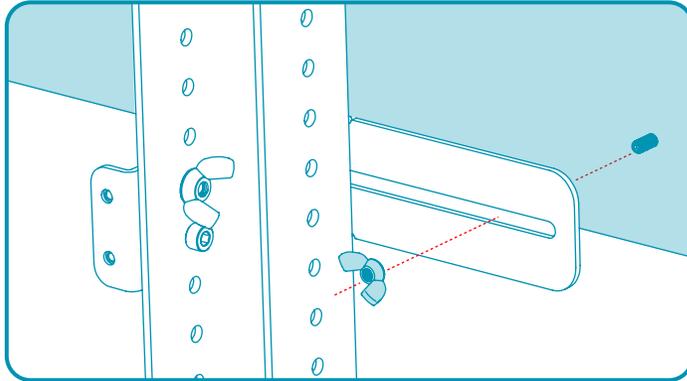

TIP

To create improved access to your mounting points in the event that you soundbar's mounting points are positioned in front of the AV Cart vertical arms, remove the bottom two screws that fasten the soundbar-mounting brackets to the vertical arms, then swing your soundbar upwards.

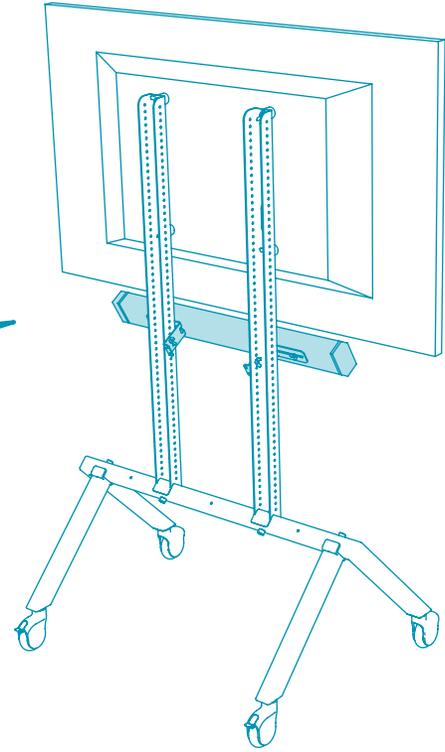
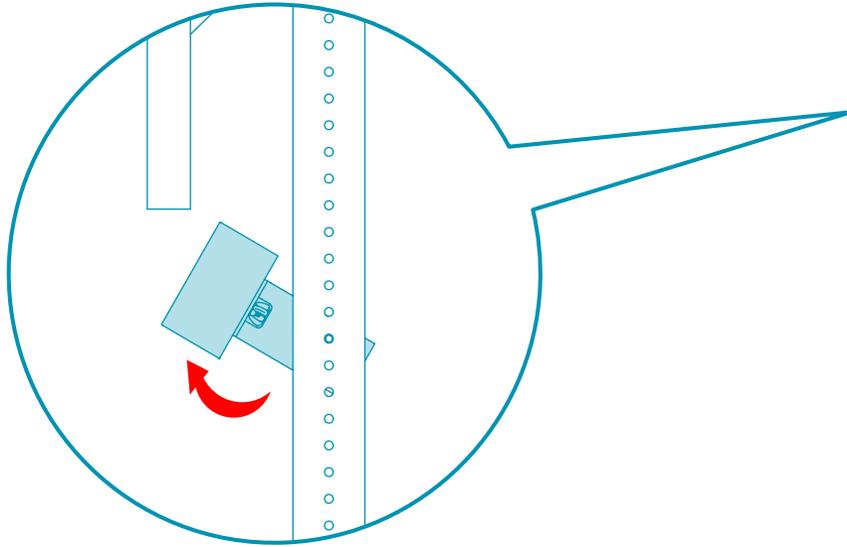


Mounting above your display

STEP 3




Install H702 Device Panel to Heckler AV Cart.


Note that this step requires the use of H702 Device Panel for Heckler AV Cart.

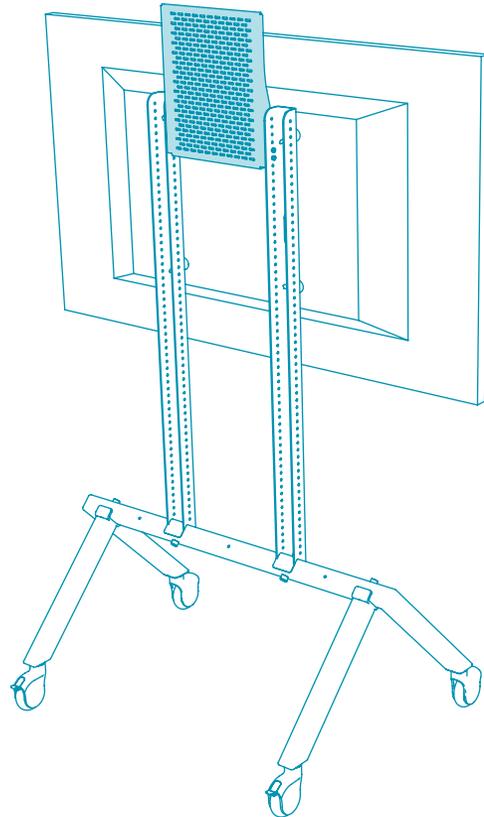

STEP 4




Install the soundbar-mounting brackets to the hole pattern of Device Panel as needed to create alignment with your soundbar's mounting points. Note that the brackets can be installed closely to each other if needed.

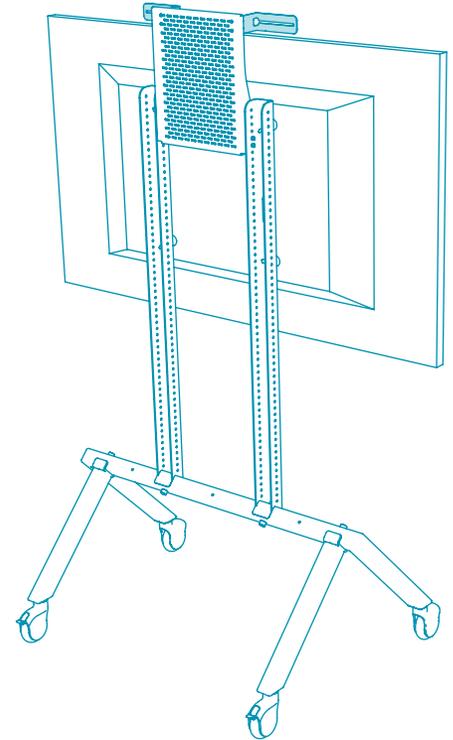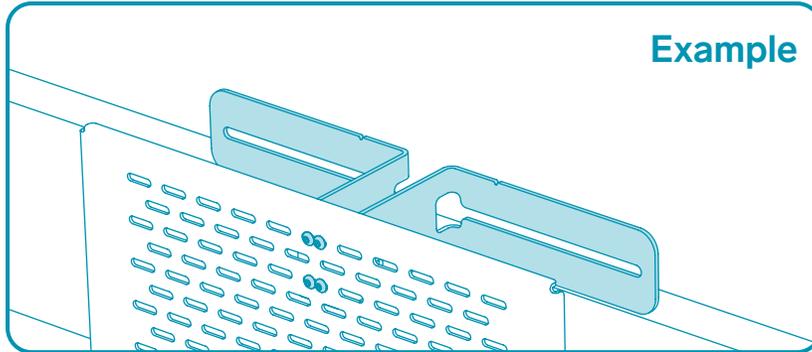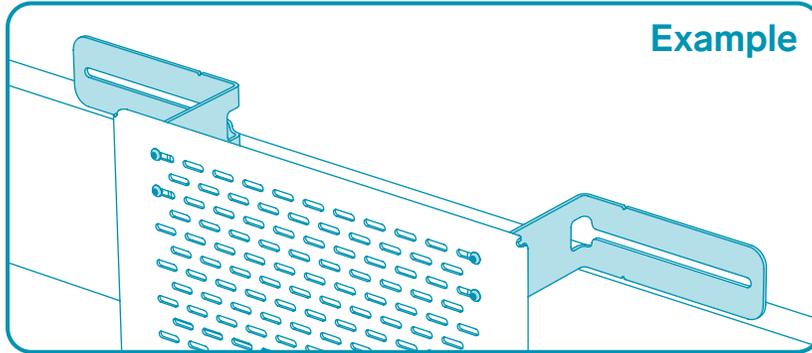

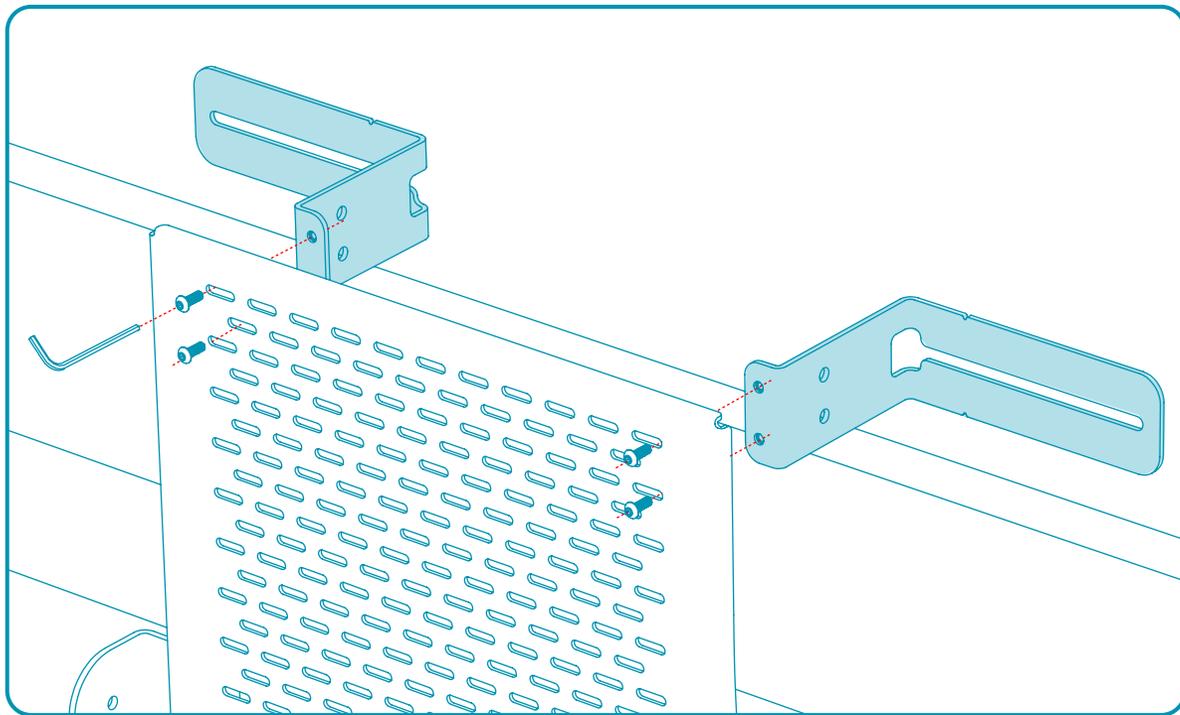



STEP 4

Fasten the wingnuts and install the soundbar.

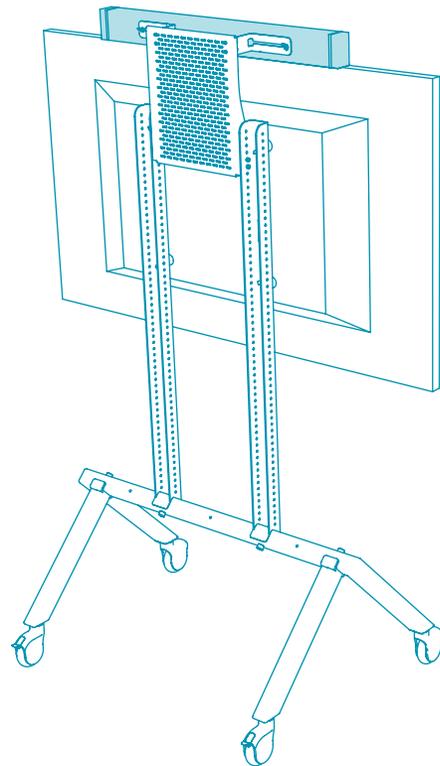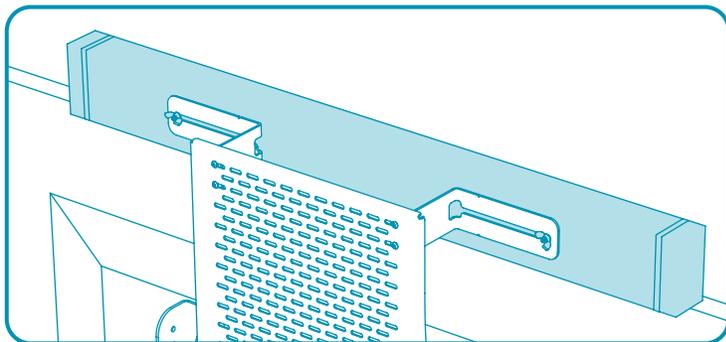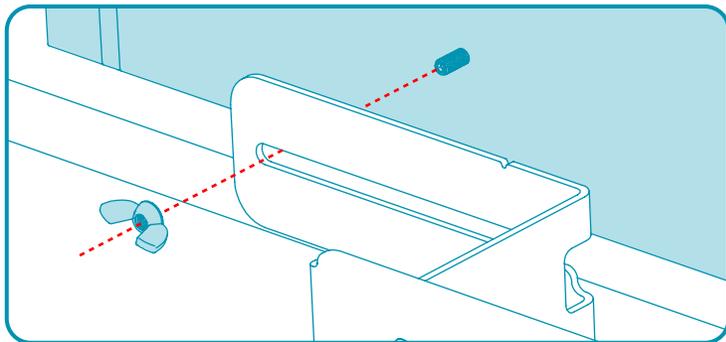

TIP

Mount a pair of Logitech Rally speakers by using two H707 Soundbar Mount kits.

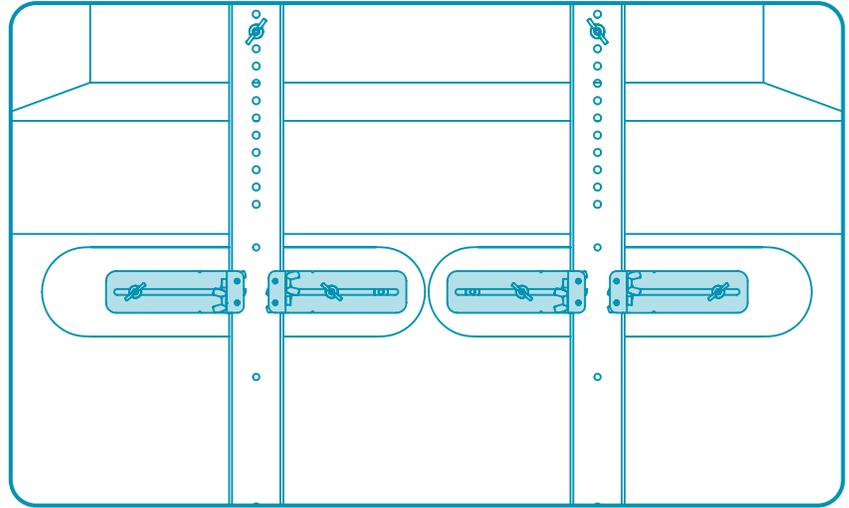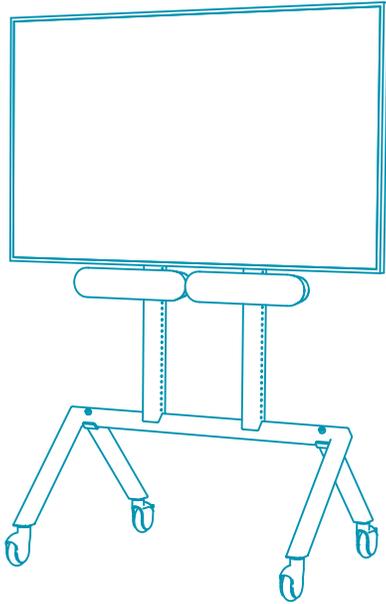

TIP

If you need to mount multiple soundbar-shaped devices, use multiple H707 Soundbar Mount kits.

